


PARALLEL PCI EXPRESS CARD USER MANUAL

MODEL 160476

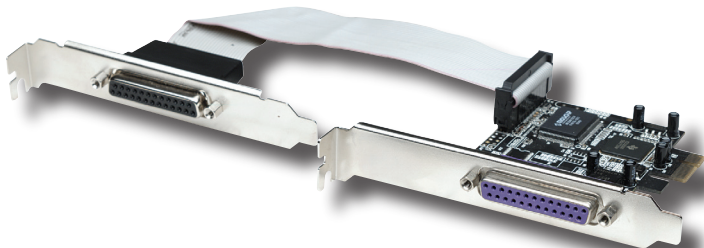

MAN-160476-UM-1106-05

Thank you for purchasing the MANHATTAN® Parallel PCI Express Card, Model 160476. Compliant with PCI Express 1.0a specifications, this card adds two configurable parallel ports to a desktop computer to support data transfer rates of up to 1.5 MBps.

HARDWARE INSTALLATION


1. Turn off the power to the computer system.
2. Unplug the power cord and remove your computer's cover.
3. Remove the slot bracket from an available PCIe slot.
4. To install the card, carefully align the card's bus connector with the selected PCIe slot on the motherboard. Push the board down firmly.
5. Connect the system power source to the board's power connector.
6. Replace the slot bracket's holding screw to secure the card.
7. Replace the computer cover and reconnect the power cord.

DRIVER INSTALLATION

NOTE: Make sure the board is installed before proceeding with driver installation.



For Windows 2000

1. On the Found New Hardware Wizard screen, click "Next."
2. Select "Search for a suitable driver for my device (recommended)," and click "Next."
3. Check "Specify a location," uncheck the other boxes, then click "Next."
4. Insert the driver CD, enter "D:\PCle\2P\2000" in the "Copy manufacturer's files from" field, then click OK. (If needed, change "D:" to match your CD-ROM drive designation.)
5. Click "Next," then "Finish."
6. Restart Windows to complete the installation.

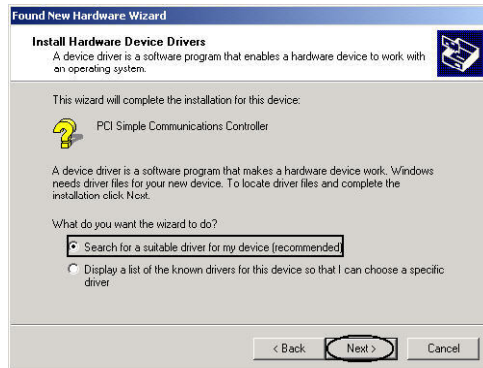



For Windows XP

1. On the Found New Hardware Wizard screen, select "Install from a list or specific location (Advanced)," then click "Next."
2. Insert the driver CD, check "Include this location in the search" and enter "D:\PCIe\2P\XP" in the blank field, uncheck the other box, then click "OK." (If needed, change "D:" to match your CD-ROM drive designation.)
3. If the Hardware Installation window pops up, click "Continue Anyway," then click "Finish." The driver has been thoroughly tested for stability and compatibility.
4. Repeat steps 1-3 two more times.
5. Restart Windows to complete the installation.

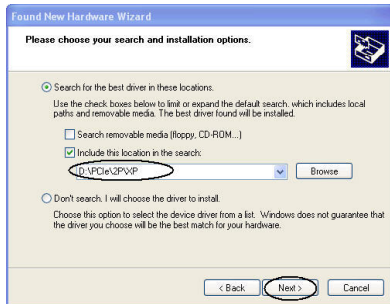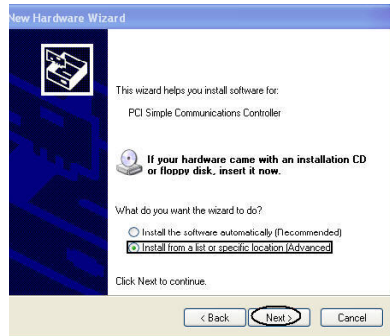


For Windows Server 2003

1. On the Found New Hardware Wizard screen, select "Install from a list or specific location (Advanced)," then click "Next."
2. Insert the driver CD, check "Include this location in the search" and enter "D:\PCIe\2P\2003" in the blank field, uncheck the other box, then click "OK." (If needed, change "D:" to match your CD-ROM drive designation.)
3. If the Hardware Installation window pops up, click "Continue Anyway," then click "Finish." The driver has been thoroughly tested for stability and compatibility.
4. Repeat steps 1-3 two more times.
5. Restart Windows to complete the installation.

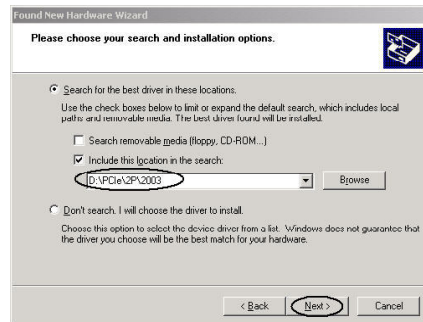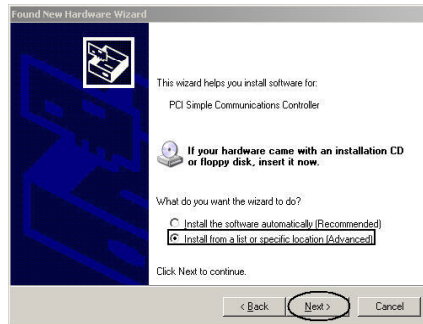

Verifying Windows 2000/XP/Server 2003 Installation

1. Right click on "My Computer," then click "Manage." Click on "Device Manager."
2. Click on "+" in front of "Ports (COM & LPT)." Two "NetMos PCI ECP Parallel Port ..." options should be displayed.
3. Double-click on "Multifunction adapters." "NetMos 9815 PCI Multi-I/O Controller" should be displayed.

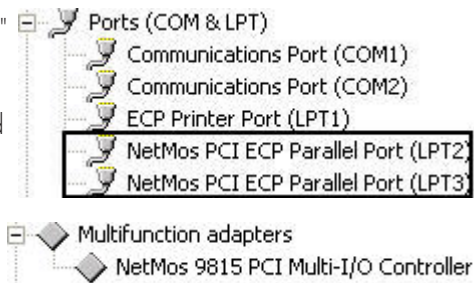

Changing the Parallel Port Address

Some parallel devices need a specific parallel port in order to work. If your device works properly, don't change this setting. Otherwise, follow these steps for Windows 2000/XP/Server 2003.

1. From the Device Manager window, double-click "Ports (COM & LPT)," then double-click on "NetMos PCI ECP Parallel Port..."
2. Click on the Port Settings tab.
3. At the "LPT Port Number" box, click the down arrow and select an LPT port that is not in use.
4. Click "OK," then close Device Manager to save the changes.

SPECIFICATIONS

Port Specifications

- Two DB25 female ports
- Fast transfer rate of up to 1.5 MBps
- Multi-mode support of SPP, PS2, EPP and ECP
- MosChip printer port controller
- Single 3.3 V operation
- PCI-compliant 1284 printer port
- Re-map function for legacy ports
- 16-byte transmit/receive FIFO

Bus Specifications

- PCI Express x1
- Texas Instruments chipset
- Bus speed: 2.5 Gbps
- Fully compliant to PCI Express specifications 1.0a

System Requirements

- Windows 2000/XP/Server 2003/Vista
- PCI Express-enabled system with an available PCI Express slot
- CD-ROM drive

Package Contents

- Parallel PCI Express Card with DB25 female port, x1 lane
- Bracket with one DB25 female port
- User manual and driver CD



www.manhattan-products.com

Are you completely satisfied with this product?
Please contact your MANHATTAN® dealer with comments or questions.

Copyright © MANHATTAN

All products mentioned are trademarks or registered trademarks of their respective owners.